

System sheet PA-HS PU 136-T 35

Description


For finishing sprayed polyurethane insulation.

Application area's

- Roofs
- Tanks outside

Most important properties

- Solvent-free
- Impact resistant

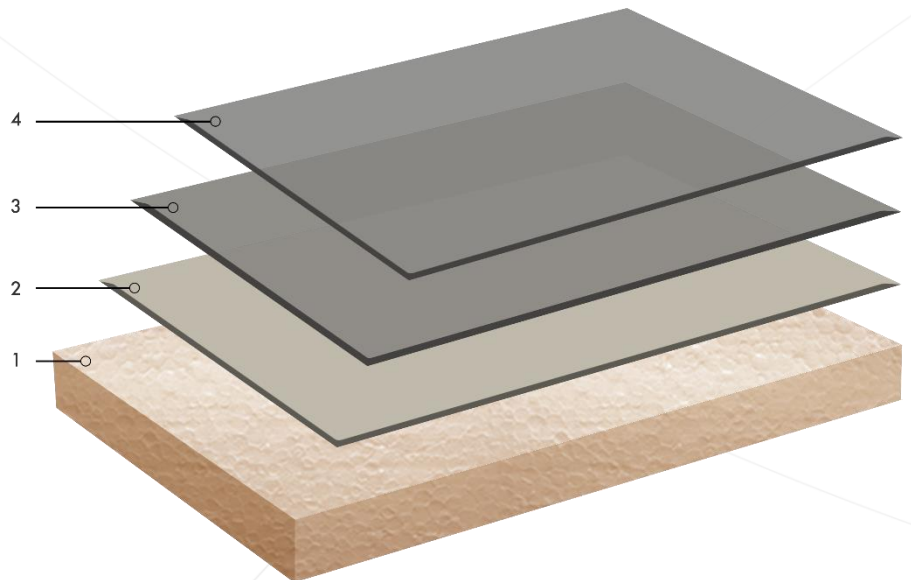

1. Insulating material with the right compression and density
2. Rocathaan Hotspray PA 136-T (2 – 3 kg/m²/layer)
3. First layer of Rocathaan Topcoat 35 in the desired colour (± 0,20 kg/m²/layer)
4. Second layer of Rocathaan Topcoat 35 in the desired colour (± 0,15 kg/m²/layer)

If desired, another brand and type of topcoating may be used. Check whether this goes together with the previous layer.

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.com • info@prokol.com

Liquid synthetic materials for a sustainable future