

System sheet ProFlect White Roof Coating

Description


Reflective white roof coating that keeps the temperature of the roof, and consequently the indoor temperature, low.

Application area's

- Roofs
- Underneath solar panels

Most important properties

- Reflective
- Remains elastic
- Extended lifespan of the current roof

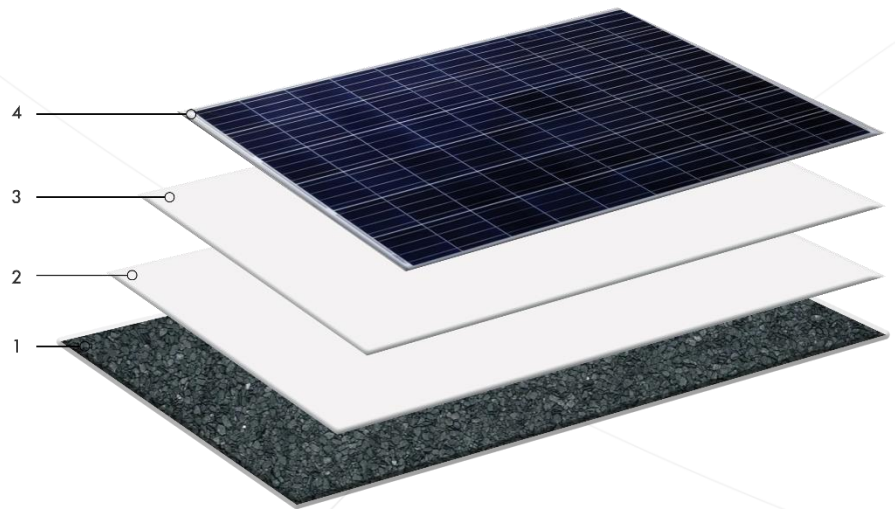

- 1. Pre-treat surface correctly**
- 2. First layer of ProFlect White Roof Coating ($\pm 0,40 \text{ kg/m}^2/\text{layer}$)**
- 3. Second layer of ProFlect White Roof Coating ($\pm 0,40 \text{ kg/m}^2/\text{layer}$)**
- 4. Solar Panels (optional)**

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.com • info@prokol.com

Liquid synthetic materials for a sustainable future