

# System sheet ProRoof PA-FR

## Description


Seamless roof sealing based on Hotspray for both old and new roofs.

## Application area's

- Roofs
- Roof gardens

## Most important properties

- Waterproof
- Crack-bridging
- Remains elastic
- Resistant to temperature shocks

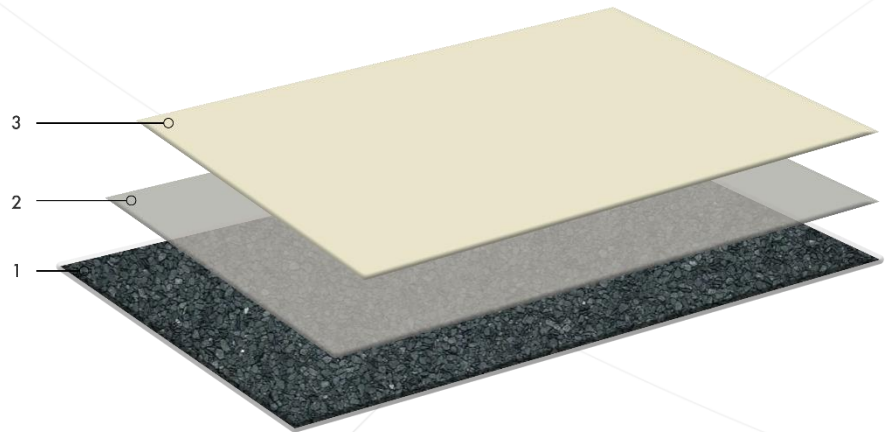

**1. Pre-treat surface correctly**

**2. Primer (when necessary) based on the primer table and/or professional advise**

**3. Rocathaan Hotspray PA 260-FR ( $\pm 2,5 \text{ kg/m}^2/\text{layer}$ )**

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21  
www.prokol.com • info@prokol.com

**Liquid synthetic materials for a sustainable future**