

# System sheet ProTherm HCS

## Description


Waterproof finish for (underground) thermal energy heat and cold storage.

## Application area's

- Thermal storage
- Heat storage
- Cold storage

## Most important properties

- Waterproof
- Highly impact-resistant
- Remains slightly elastic
- Crack-bridging

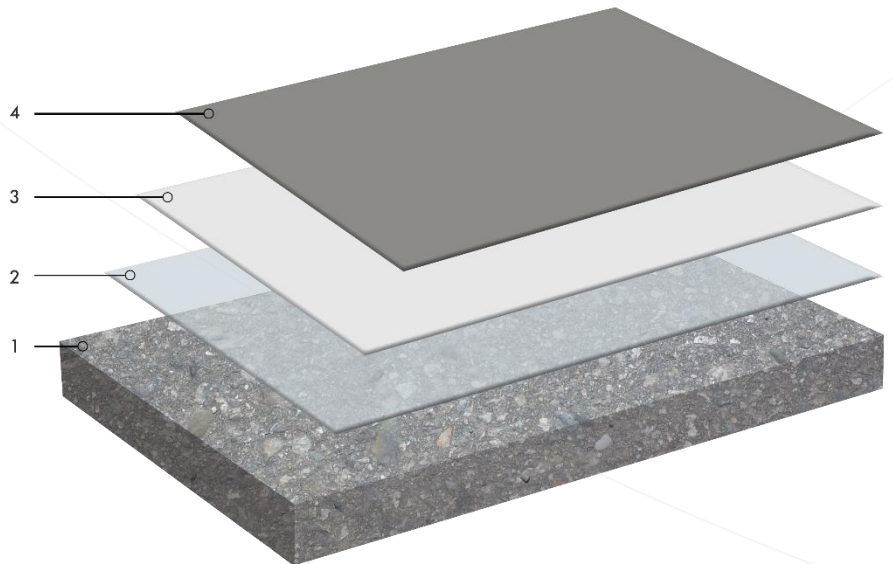

1. Pre-treat surface correctly
2. Rocapox Resin 100-TX ( $\pm 0,25 \text{ kg/m}^2/\text{layer}$ )
3. Rocapox Epoxy Gel ( $\pm 0,5 \text{ kg/m}^2/\text{layer}$ )
4. Rocathaan Hotspray PA 136-T ( $\pm 2,5 \text{ kg/m}^2/\text{layer}$ )

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21  
www.prokol.com • info@prokol.com

**Liquid synthetic materials for a sustainable future**